

Typ: Socket straight mid-profile
7.85 mm unmated

Number of pins: 12 to 80

Pitch: 0.8 mm


Operational current: 1.4 A at 20°C (52 pins)

Packaging: Tape & Reel

Approval: RoHS COMPLIANT

Technical Specifications on page 19

For drawings and technical data visit www.ept.de/Zero8

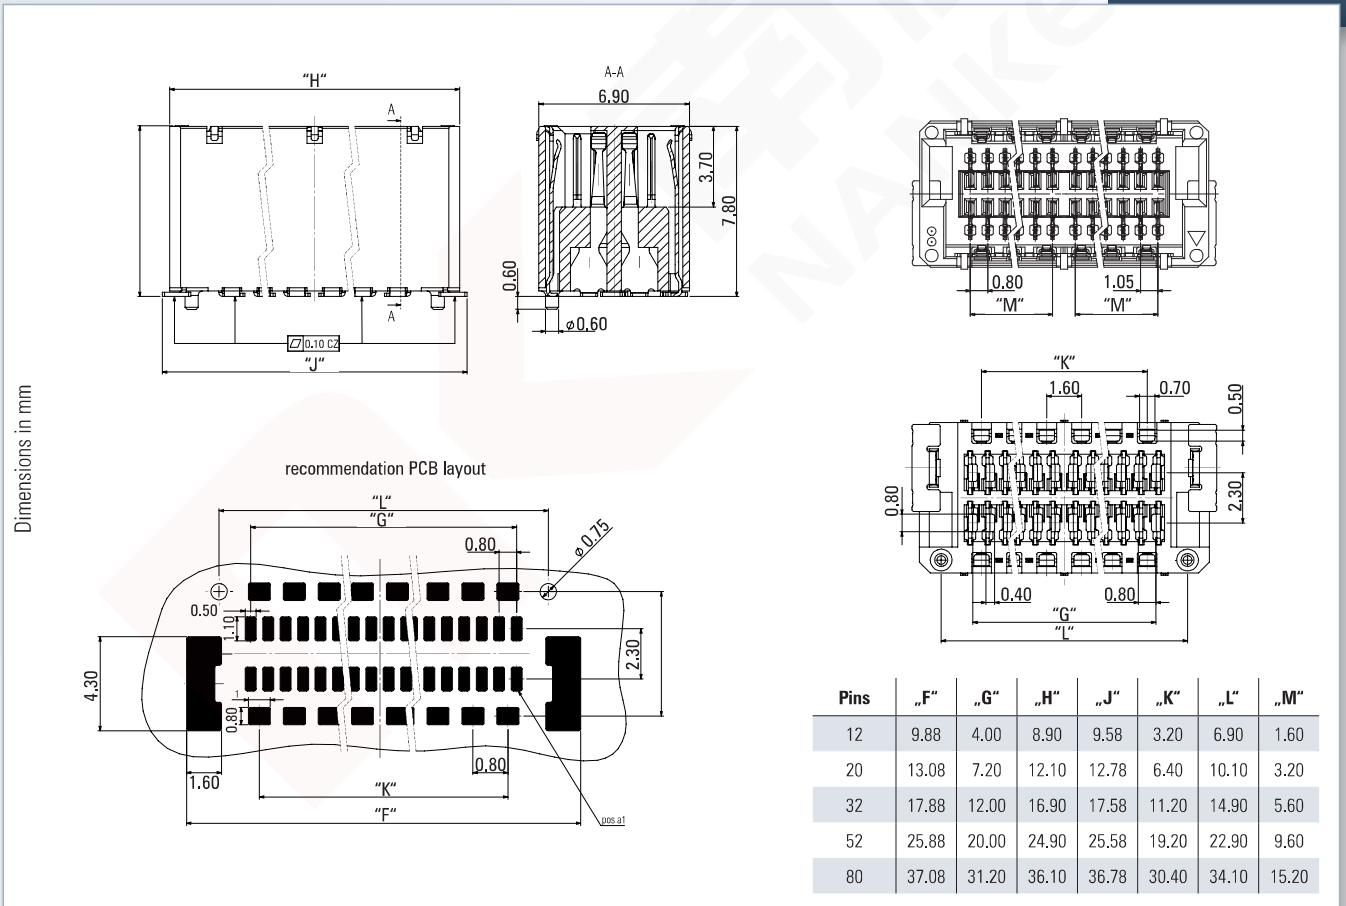

Mating connector / Application:




for parallel applications (p. 22-23)

**Socket mid-profile - Performance level I**

Number of pins	Part number	PU (Tape & Reel)
12	406-53112-51	250
20	406-53120-51	
32	406-53132-51	
52	406-53152-51	
80	406-53180-51	

On request

- different number of pins
- other performance level

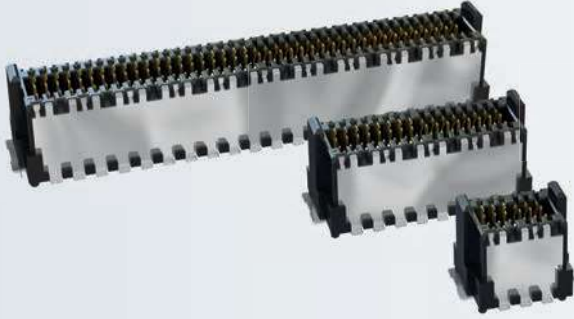

Typ: Plug straight mid-profile
 2.65 mm unmated

Number of pins: 12 to 80

Pitch: 0.8 mm


Operational current: 1.4 A at 20°C (52 pins)

Packaging: Tape & Reel

Approval:

Technical Specifications on page 19

For drawings and technical data visit www.ept.de/Zero8

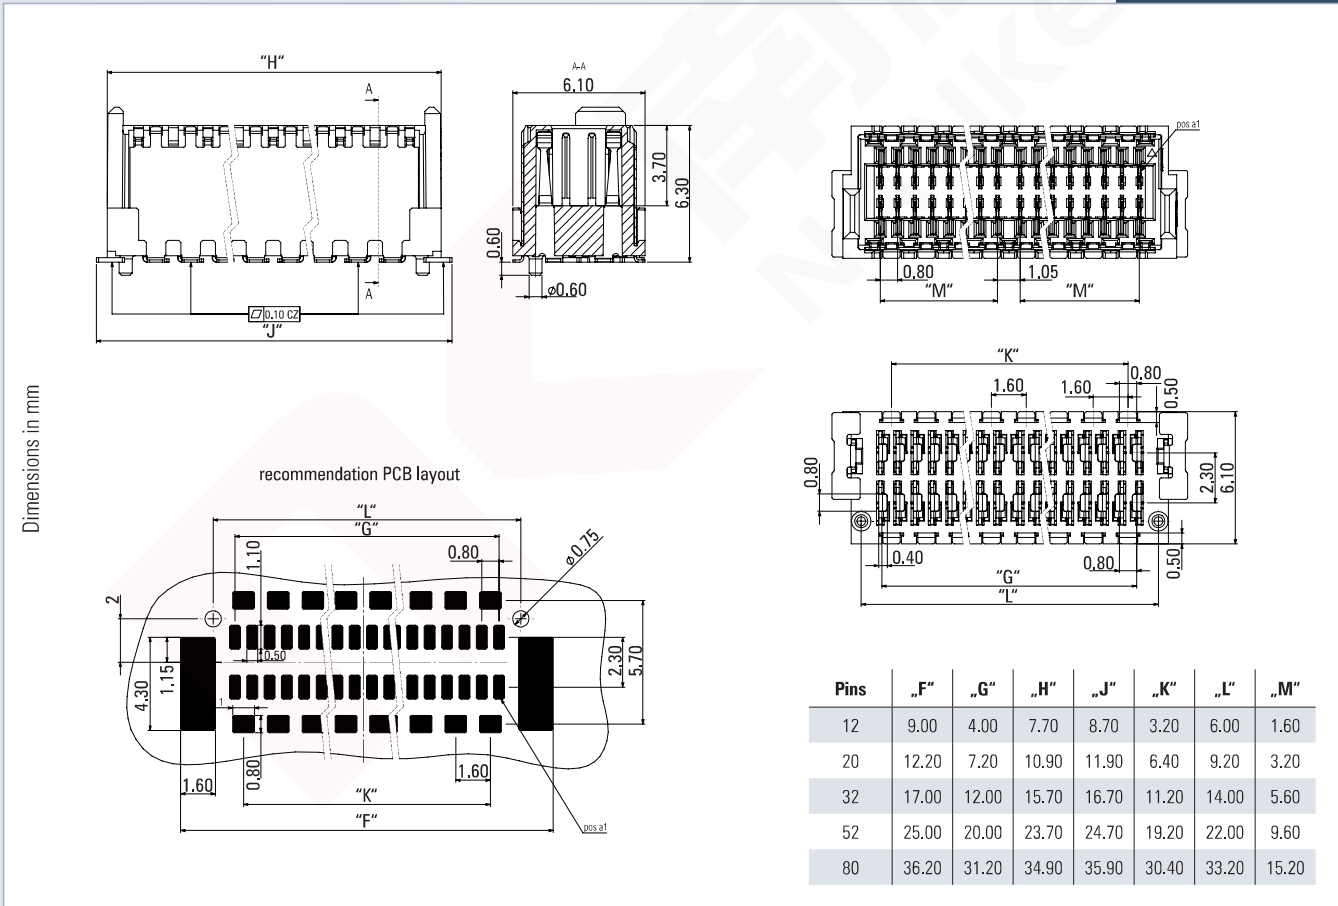

Mating connector / Application:



for parallel applications (p. 20-21)

**Plug mid-profile - Performance level I**

Number of pins	Part number	PU (Tape & Reel)
12	405-53112-51	250
20	405-53120-51	
32	405-53132-51	
52	405-53152-51	
80	405-53180-51	

On request

- different number of pins
- other performance level